




A Allen key

- Galvanized steel

| Size | Cat. No. |
|------|------------|
| SW 4 | 008.28.044 |
| SW 5 | 008.28.250 |
| SW 6 | 008.28.260 |

Order qty: Multiples of 100 pcs

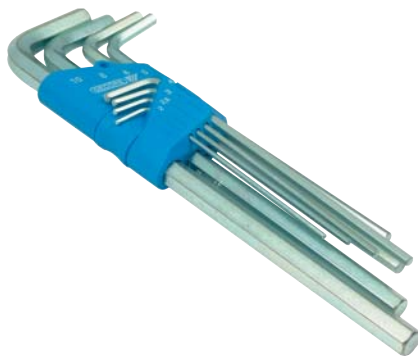

B Allen key set

- Consists of: 1 each of SW2, SW2.5, SW3, SW4, SW5, SW6, SW8 and SW10
- In a plastic clip
- Galvanised steel

| No. of allen keys | Cat. No. |
|-------------------|------------|
| 8 | 008.28.421 |

Order qty: 1 pc



C Häfele allen key set

- Consists of: 1 of each SW2, SW3, SW4, SW5, SW6, SW7, SW8
- In plastic casing

| No. of allen keys | Cat. No. |
|-------------------|------------|
| 7 | 006.28.410 |

Order qty: 1 pc



D TORX® key set with MagicSpring®

- For all TORX® screw applications
- MagicRing® made from stainless steel holds TORX® screws tight at various angles. Popular key sizes kept in a well-organised holder
- Consists of: 1 each T6, T7, T8, T9, T10, T15 and T20
- Chrome-vanadium steel, through hardened, manganese-phosphated

| No. of keys | Cat. No. |
|-------------|------------|
| 7 | 008.28.390 |

Order qty: 1 pc




E Hex key set with Magic ring®

- Insert or remove screws from bore holes
- Space saving ProStar allows the easy removal of each key without moving any others
- MagicRing® made from spring steel holds all standard screws tight at various angles (available from 3 mm)
- Profile, length and hardness according to ISO 2936L
- Consists of: 1 each 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0 and 10.0 mm
- Chrome-vanadium steel, through hardened, nickel-plated

| No. of keys | Cat. No. |
|-------------|------------|
| 9 | 008.28.409 |

Order qty: 1 pc



F Ball ended hex key set with Magic ring®

- Insert or remove metric screws from bore holes, especially in difficult to access areas
- Space saving ProStar allows the easy removal of each key without moving any others
- MagicRing® made from spring steel holds all standard screws tight at various angles (available from 3 mm). The ball point enables the user to work at angles up to 25°
- Profile, length and hardness according to ISO 2936L
- Consists of: 1 each 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0 and 10.0 mm
- Chrome-vanadium steel, through hardened, nickel-plated

| No. of keys | Cat. No. |
|-------------|------------|
| 9 | 008.28.426 |

Order qty: 1 pc



G Combination ratchet spanner

- With lever ratchet offset to 15°
- Certain sizes are colour coded - these sizes will take adaptors in the ring end so that the spanner end can be converted to a square drive

| Length | Size | For square driver | Cat. No. |
|--------|-------|-------------------|--------------------|
| 140 mm | 8 mm | - | 008.22.660 |
| 150 mm | 9 mm | - | 008.22.661 |
| 160 mm | 10 mm | 1/4" | 4115.10 008.22.662 |
| 160 mm | 11 mm | - | 008.22.663 |
| 170 mm | 12 mm | - | 008.22.664 |
| 180 mm | 13 mm | - | 008.22.665 |
| 200 mm | 15 mm | 3/8" | 6015.15 008.22.667 |
| 210 mm | 16 mm | - | 008.22.668 |
| 220 mm | 17 mm | - | 008.22.669 |
| 230 mm | 18 mm | - | 008.22.670 |
| 245 mm | 19 mm | 1/2" | 5115.19 008.22.671 |

Order qty: 1 pc