

**A Security glazing tape**

- Double sided self adhesive PVC foam
- 9 or 12 mm width
- 25, 33 or 40 m rolls

T x W	Colour	Reel length	Cat. No.
1.5x9 mm	White	40 m	950.17.307
1.5x9 mm	Black	40 m	950.17.303
1.5x12 mm	White	40 m	950.17.317
1.5x12 mm	Black	40 m	950.17.313
2x9 mm	Black	33 m	950.17.323
2x12 mm	Black	33 m	950.17.333
3x9 mm	Black	25 m	950.17.343
3x9 mm	White	25 m	950.17.347
3x9 mm	Brown	25 m	950.17.341
3x12 mm	Black	25 m	950.17.353
3x12 mm	White	25 m	950.17.357
3x12 mm	Brown	25 m	950.17.351

Order qty: 1 pc



**C Intumescent glazing tape**

- For fitting to both sides of glass before it is sandwiched between the porthole frames
- Available in either 1.6 or 3.2 mm thickness to suit varying door and glass thicknesses
- For 1/2 hour fire rated timber doors
- In the event of fire, the tape starts to intumesce at 176°C expanding 6-8 times its volume ensuring the integrity of the door and porthole frame
- With PSA backing
- 9.5 mm width
- 2438 mm rolls

Thickness	Cat. No.
1.6 mm	973.99.110
3.2 mm	973.99.111

Order qty: 1 pc



**D Intumescent glazing liner**

- For 1/2 hour fire rated timber doors
- In the event of fire, the liner starts to intumesce at 288°C expanding 80 times its volume ensuring the integrity of the door and porthole frame
- With PSA backing
- 2438 mm rolls

Thickness x Width	Cat. No.
1.6 x 44 mm	973.99.120

Order qty: 1 pc



**E Lath tape**

- Double-sided adhesive tape for universal applications
- For sticking decorative strips, laths, cable ducts, signs, plastic profiles, etc.
- Equal adhesion on both sides
- Very high initial and final adhesion
- Acrylate adhesive
- 50 m rolls

Tape width	Cat. No.
9 mm	003.58.259
15 mm	003.58.265

Order qty: 1 pc




**F Insulating tape**

- Self extinguishing BS3924
- 19 mm width
- 20 m rolls

Colour	Cat. No.
Black	079.00.060
Blue	079.00.061
Brown	079.00.062
Green/Yellow	079.00.063
Grey	079.00.064
Red	079.00.065
White	079.00.066
Yellow	079.00.067

Order qty: 1 pack (1 pack = 10 pcs)

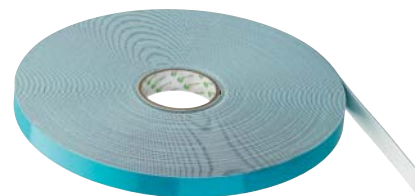

**G Mirror tape**

- Double-sided foam adhesive tape for permanent mounting on smooth and rough surfaces
- For mounting mirrors, PVC window transoms, and for mounting elements on tiles
- Equal adhesion on both sides
- Dampens and compensates for vibration
- Resistant to aging, UV and softeners
- Final hardness after 24 hours
- Temperature range: -40°C to +95°C; with lower temperatures the initial adhesion of the tape is reduced
- Always apply adhesive strips vertically, not horizontally to mirror
- 50 m rolls

Thickness x Width	Cat. No.
1.0 x 19 mm	003.58.219
1.0 x 25 mm	003.58.225
1.5 x 19 mm	003.58.220
1.5 x 25 mm	003.58.226

Order qty: 1 pc

**B Glazing tape**

- For fitting to both sides of glass before it is sandwiched between the porthole frames
- Available in either 1.6 or 3.2 mm thickness to suit varying door and glass thicknesses
- For non fire rated doors
- Black closed cell polyvinyl chloride foam with PSA backing
- 9.5 mm width
- 30 or 61 m rolls

Thickness	Roll length	Cat. No.
1.6 mm	61 m	973.99.100
3.2 mm	30 m	973.99.101

Order qty: 1 pc