


- Minifix connecting bolts **A** with M6 thread are used in conjunction with sleeves or dowels for installation in  $\varnothing 8$  mm or  $\varnothing 10$  mm pre-drilled holes
- For single-sided constructions



**= Cross slot**  
Tighten with PZ2 screwdriver only (cross-slot size 2)



**= Combination slot**  
Tighten with a PZ2 screwdriver or flat bladed screwdriver

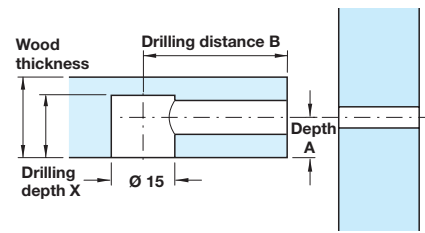


### A Connecting bolt

- With M6 thread, for screwing into sleeves or dowels for installation in  $\varnothing 8$  mm or  $\varnothing 10$  mm holes
- Steel

Drilling distance B	24 mm	34 mm
<b>Thread length 7.5 mm</b>		
Bright	262.27.047	262.28.044
Galvanized	262.27.949	262.28.946
<b>Thread length 12 mm</b>		
Bright	262.27.041	262.28.041
Galvanized	262.27.941	262.28.941

Order qty: Multiples of 100 pcs



## 5


### Connecting Fittings

### B Spreading sleeve, M6 internal thread

- For  $\varnothing 8$  mm hole
- Press-fit installation
- With nylon pellets
- Bright brass

Length	Drilling depth	Cat. No.
9 mm	9.5 mm	039.00.267
12 mm	15 mm	039.00.061

Order qty: Multiples of 100 pcs




### C Glued in sleeve, M6 internal thread

- For  $\varnothing 8$  mm hole
- With grooves for glue
- Plastic

Length	Outer Ø	Cat. No.
11 mm	8.5 mm	039.33.462

Order qty: Multiples of 100 pcs




### D Glued in sleeve, M6 internal thread

- For  $\varnothing 10$  mm hole
- With grooves for glue
- Natural coloured nylon

Length	Individual	Strip of 20
9 mm	039.33.364	-
11 mm	039.33.266	-
13 mm	039.33.060	039.34.067*

Order qty: Multiples of 100 pcs (= 5 strips\*)



### E Sleeve, ribbed, M6 internal thread

- For  $\varnothing 10$  mm hole
- Press-fit installation
- White plastic

Length	Cat. No.
18 mm	262.76.700

Order qty: Multiples of 100 pcs

