


Concealed Hinges

Essentials Standard 110° Hinges with Slide On Arms

- Opening angle **110°**
- 0 mm, 9 mm or 17 mm crank
- Sprung or unsprung
- Ø 35 mm cup, 48 mm cup fixing centres
- Screw fixing cup
- Slide on arms
- Nickel-plated pressed steel cup and arm
- **Mounting plates** for these slide on hinges are shown on page 38
- **Hinge arm cover plates** are shown on page 38
- Soft close compatible on sprung hinges

Screw fixing

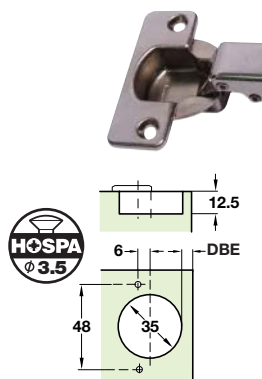

Slide on

Crank	Sprung	Unsprung
0	316.01.608	316.00.601
9	316.01.617	316.00.610
17	316.01.626	316.00.629

Order qty: Multiples of 10 pcs



Mounting screws

- Hospa chipboard screws, raised head, Ø 3.5 mm with cross slots
- Nickel-plated steel




Length	Cat. No.	Order qty
15 mm	015.55.639	1000
17 mm	015.55.648	1000
20 mm	015.55.657	1000


Soft close clip on fitting for sprung hinges shown on page 38

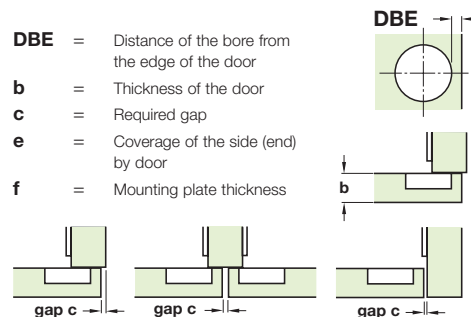


0 Crank

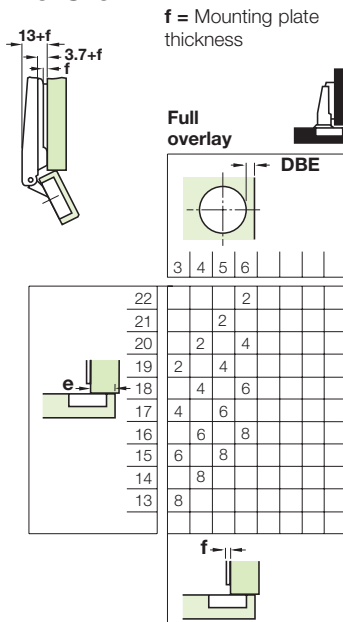

9 Crank

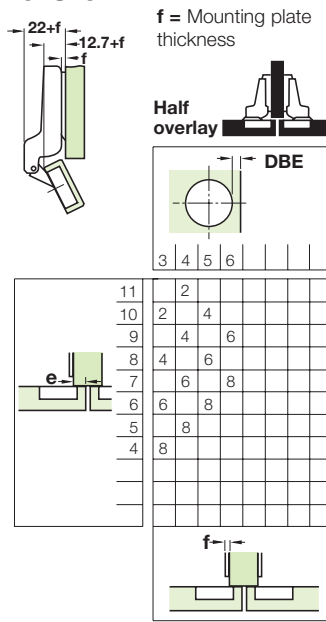

17 Crank

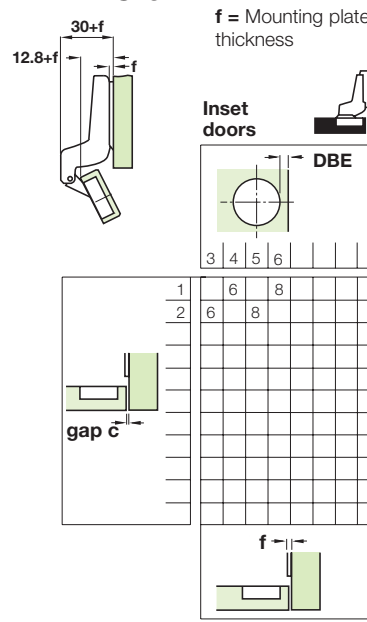

TCH-FF 2010, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.