


# Fixing Materials


## Spax Screws

### Spax screws

- For use in wood, chipboard, plastic or sheet metal
- **Features:**
  - Multihead penetrates flush to the surface: Mills into wood, stops at metal
  - Patented shaft profile - right to the tip for fast, secure fastening of screws
  - 4CUT tip: Square shaft separates wood fibre - no pre-drilling required and no splitting
  - Yellow passivated finish - passivated coating offers greater resistance to corrosion
- Refer to table below for driver bits selection guide

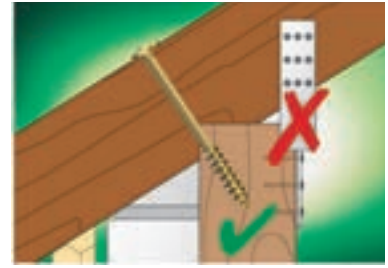

Please order screws in multiples of order quantity shown.

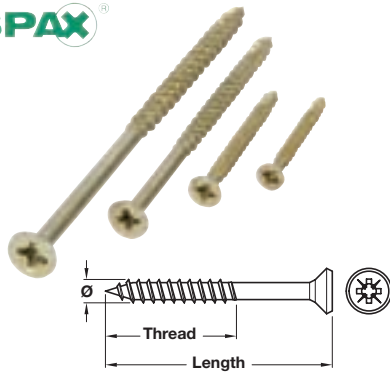


#### A Spax screw, flat countersunk head

- Pozi bit head
- Zinc yellow passivated

ØxLength/Thread	Cat. No.	Order qty
3.0x 12 mm	018.01.051	200
3.0x 16 mm	018.01.054	200
3.0x 20 mm	018.01.056	200
3.5x 12 mm	018.01.081	200
3.5x 16 mm	018.01.084	200
3.5x 20 mm	018.01.086	200
3.5x 25 mm	018.01.089	200
3.5x 30 mm	018.01.091	200
3.5x 35 mm	018.01.093	200
3.5x 40 mm	018.01.094	200
4.0x 16 mm	018.01.114	200
4.0x 20 mm	018.01.116	200
4.0x 25 mm	018.01.119	200
4.0x 30 mm	018.01.121	200
4.0x 35 mm	018.01.123	200
4.0x 40 mm	018.01.124	200
4.0x 45 mm	018.01.125	200
4.0x 50 mm	018.01.126	200
4.0x 60 mm	018.01.128	100
5.0x 25 mm	018.01.179	200
5.0x 30 mm	018.01.181	200
5.0x 40 mm	018.01.184	200
5.0x 45 mm	018.01.185	200
5.0x 50 mm	018.01.186	200
5.0x 60 mm	018.01.188	100
5.0x 70 mm	018.01.190	100
5.0x 80 mm	018.01.191	100
5.0x 90/60*	018.01.492	100
5.0x 100/60*	018.01.493	100
6.0x 60 mm	018.01.218	100
6.0x 80 mm	018.01.221	100
6.0x 100/60*	018.01.523	100
6.0x 120	018.01.525	100


\* = Partially threaded

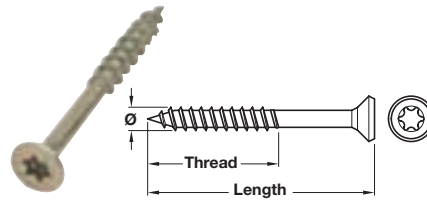

#### B Spax screw, flat countersunk head

- T star bit head
- Zinc yellow passivated

ØxLength/Thread	Cat. No.	Order qty
3.0x 12 mm	018.51.221	200
3.0x 16 mm	018.51.224	200
3.0x 20 mm	018.51.231	200
3.5x 16 mm	018.51.384	200
3.5x 20 mm	018.51.386	200
3.5x 25 mm	018.51.389	200
3.5x 30/17	018.51.391	200
3.5x 35/22	018.51.393	200
3.5x 40/22	018.51.394	200
3.5x 45/30	018.51.395	200
3.5x 50/30	018.51.396	200
4.0x 20 mm	018.51.416	200
4.0x 25 mm	018.51.419	200
4.0x 30/17	018.51.421	200
4.0x 35/22	018.51.423	200
4.0x 40/22	018.51.424	200
4.0x 45/30	018.51.425	200
4.0x 50/30	018.51.426	200
4.0x 60/35	018.51.428	100
4.0x 70/42	018.51.430	100
4.5x 30/17	018.51.451	200
4.5x 35/23	018.51.453	200
4.5x 40/23	018.51.454	200
4.5x 45/30	018.51.455	200
4.5x 50/30	018.51.456	200
4.5x 60/35	018.51.458	100
4.5x 70/42	018.51.460	100
4.5x 80/49	018.51.461	100
5.0x 30/17	018.51.481	200
5.0x 40/22	018.51.484	200
5.0x 50/30	018.51.486	200
5.0x 60/35	018.51.488	100
5.0x 70/42	018.51.490	200
5.0x 80/44	018.51.491	200
5.0x 90/60	018.51.492	200
5.0x 100/60	018.51.493	200
6.0x 50/30	018.51.516	200
6.0x 60/35	018.51.518	200
6.0x 70/42	018.51.520	200
6.0x 80/44	018.51.521	200
6.0x 90/60	018.51.522	100
6.0x 100/60	018.51.523	100

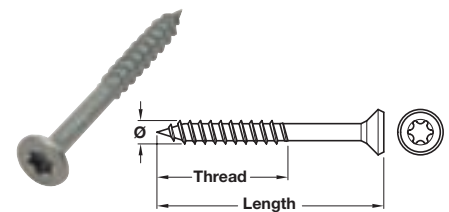

#### C Spax screw, flat countersunk head

- T star bit head
- Stainless steel

ØxLength/Thread	Cat. No.	Order qty
3.5x 30 mm	018.55.091	200
3.5x 35 mm	018.55.093	200
3.5x 40 mm	018.55.094	200
4.0x 30 mm	018.55.121	200
4.0x 35 mm	018.55.123	200
4.0x 40 mm	018.55.124	200
4.0x 45 mm	018.55.125	200
4.0x 50 mm	018.55.126	200
4.5x 40 mm	018.55.154	200
4.5x 45 mm	018.55.155	200
4.5x 50 mm	018.55.156	200
4.5x 60 mm	018.55.158	100
5.0x 40 mm	018.55.184	200
5.0x 45 mm	018.55.185	200
5.0x 50 mm	018.55.186	200
5.0x 60 mm	018.55.188	100
5.0x 70 mm	018.55.190	100
5.0x 80 mm	018.55.191	100
6.0x 60 mm	018.55.218	100
6.0x 70 mm	018.55.220	100
6.0x 80 mm	018.55.221	100
6.0x 90/60	018.55.522	100
6.0x 100/60	018.55.523	100

#### Driver bit selection guide

Pozi bit head	
Ø	Bit size
<3.0 mm	PZ1
3.5 - 5.0 mm	PZ2
>6.0 mm	PZ3
T star bit head	
Ø	Bit size
<3.0 mm	TS10
3.5 mm	TS15
4.0 - 4.5 mm	TS20
5.0 mm	TS25
6.0 - 7.5 mm	TS30
8.0 mm	TS40

Information available on request

TCH-A1 2008, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.